

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : <b>H04B 7/26</b>		A2	(11) International Publication Number: <b>WO 98/59441</b>
			(43) International Publication Date: 30 December 1998 (30.12.98)
(21) International Application Number: <b>PCT/FI98/00468</b>		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 2 June 1998 (02.06.98)			
(30) Priority Data: 972724 24 June 1997 (24.06.97) FI			
(71) Applicant (for all designated States except US): NOKIA MOBILE PHONES LTD. (FI/FI); Keilalahdentie 4, FIN-02150 Espoo (FI).			
(72) Inventors; and (75) Inventors/Applicants (for US only): HÄMÄLÄINEN, Jari (FI/FI); Nallekarhantie 20, FIN-36100 Kangasala AS. (FI). JÄRVINEN, Petri (FI/FI); Insinöörinkatu 46 B 31, FIN-33720 Tampere (FI). KNUUTILA, Jarmo (FI/FI); Mati Tapion katu 1 F 17, FIN-33720 Tampere (FI). LEP-PIISAARI, Arto (FI/FI); Satakunnankatu 5 A 25, FIN-33100 Tampere (FI). MALMIVIRTA, Kari (FI/FI); Insinöörinkatu 60 A 11, FIN-33720 Tampere (FI). OKSALA, Jarkko (FI/FI); Näyttelijäkatu 21 A, FIN-33720 Tampere (FI). SALMINEN, Ari (FI/FI); Turuntie 26 A 3, FIN-24240 Salo (FI).		Published Without international search report and to be republished upon receipt of that report.	
(74) Agent: JOHANSSON, Folke; Nokia Mobile Phones Ltd., P.O. Box 100, FIN-00045 Nokia Group (FI).			
(54) Title: TIME DIVISION MULTIPLE ACCESS RADIO SYSTEMS			
<p>The diagram illustrates the time division multiple access (TDMA) frame structure. It shows two Mobile Station (MS) TX frames and one MS RX frame. Each frame is divided into 16 time slots, numbered 7, 0, 1, 2, 3, 4, 5, 6, 7, 0, 1, 2, 3, 4, 5, 6, 7, 0. The MS TX frames show two separate TX frames, each with 16 slots. The MS RX frame shows one RX frame with 16 slots.</p>			
(57) Abstract			
<p>A method of operating a time division multiple access (TDMA) radio system having multi-slot capabilities and utilising half-duplex transmission/reception where uplink and downlink user data transmissions between a mobile station (MS) (2) and a base station (BS) (3) are made in separate TDMA frames. A greater number of time slots are allocated to the mobile station (2) in each downlink TDMA frame than in each uplink TDMA frame to improve the efficiency of radio resource allocation and of the radio module (4) of the mobile station (2).</p>			

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 98/59441

PCT/FI98/00468

1

Time Division Multiple Access Radio Systems

The present invention relates to time division multiple access radio systems and more particularly to time division multiple access radio systems which have multi-slot capabilities.

- Many existing digital wireless or mobile telephone networks make use of time division multiple access (TDMA) to share out radio resources between a number of mobile stations and between a number of channels. For example, in the European Telecommunications Standards Institute (ETSI) GSM standard, a given frequency band is divided in the time domain into a succession of frames, known as TDMA (Time Division Multiplexed Access) frames. The length of a TDMA frame is 4.615ms. Each TDMA frame is in turn divided into eight consecutive slots of equal duration. In the conventional circuit switched transmission mode, when a call is initiated, a full rate bidirectional traffic channel (TCH/F) is defined for that call by reserving two time slots (1 to 8), in each of a succession of TDMA frames, for the duration of the call. One of these slots provides the downlink from the base station (BS) to the mobile station (MS) whilst the other provides the uplink.
- The circuit switched transmission mode in GSM provides for a data transmission rate of 9.6kbps. However, due to the demand for higher transmission rates, a set of GSM enhancements known as GSM Phase 2+ have been specified by ETSI. One of the main features of GSM Phase 2+ is known as High Speed Circuit Switched Data (HSCSD - specified in GSM 02.34 and GSM 03.34) which achieves an increased data transmission rate by using more than one TCH/F for a single connection (i.e. effectively reserving two or more consecutive time slots in each TDMA frame).

- GSM Phase 2+ also specifies (see for example GSM 01.60, 02.60, 03.60, and 03.64) a new feature known as General Packet Radio Service (GPRS). GPRS provides for the dynamic allocation of radio resources, with the allocation for uplink and downlink communications being made separately and independently of each other. That is to say that a time slot is allocated to a particular MS to BSS link only when there is data to be transmitted. The unnecessary reservation of a TCH/F, when there is no data to be transmitted, is thus avoided. In addition, a high speed packet switched

WO 98/59441

PCT/FI98/00468

2

transmission channel may be provided by assigning two or more slots in each of a succession of TDMA frames to a single MS.

5 In the current GSM standard, because only a single time slot in each TDMA frame can be reserved for the uplink channel, and similarly for the downlink channel, it is easy to keep the two reserved slots separated in time so that a single radio module can be used, in the MS, for both transmission and reception. This module can also be used for monitoring the radio conditions in the serving cell and in neighbouring cells. However, with the introduction of HSCSD and GPRS where the number of reserved slots in a TDMA frame is variable, if slots are reserved for both uplink and downlink transmission in the same TDMA frame then there exists the possibility that uplink and downlink slots will overlap in time. Communication is then 'full-duplex' and it is necessary to provide separate radio modules for transmission, reception, and monitoring, i.e. a total of three radio modules. The preferred option is therefore to use only 'half-duplex' communication where uplink and downlink transmissions are made in alternate TDMA frames. The possibility for uplink and downlink transmissions to overlap is therefore eliminated as is the need for separate radio modules in the MS. Current proposals are for symmetric uplink and downlink resource allocation where the same number of time slots in alternate frames are reserved for both uplink and downlink transmissions.

25 According to a first aspect of the present invention there is provided a method of operating a time division multiple access (TDMA) radio system having multi-slot capabilities and utilising half-duplex transmission/reception where uplink and downlink user data transmissions between a mobile station (MS) and a base station (BS) are made in separate TDMA frames, the method comprising allocating a greater number of time slots in each downlink TDMA frame than in each uplink TDMA frame, to said mobile station.

30 This asymmetric allocation of resources is possible because the amount of data transferred over the downlink is, in general, considerably greater than that transferred over the uplink. For example, where the MS is used to access the Internet. The present invention gives rise to a number of significant advantages over the previously proposed symmetric allocation. Firstly, because the MS is transmitting over fewer time slots, the implementation of the power amplifier of the radio module

35

WO 98/59441

PCT/FI98/00468

3

is made simpler. Power losses are reduced as, consequently, are heat sink requirements. Secondly, power consumption is reduced increasing the stand-by and active operating times of the MS and making the selection of appropriate batteries easier. Thirdly, the price of the mobile station is reduced.

5

Preferably, the uplink and downlink TDMA frames are provided by alternate TDMA frames of a selected frequency band. The TDMA radio system may utilise GPRS or HSCSD protocols. However, other suitable protocols may also be used.

- 10 Embodiments of the invention may make use of four time slots for the downlink and two time slots for the uplink. However, any other suitable combination may be used.

According to a second aspect of the present invention there is provided a time division multiple access (TDMA) radio system having multi-slot capabilities and  
15 utilising half-duplex transmission/reception where uplink and downlink user data transmissions between a mobile station (MS) and a base station (BS) are made in separate TDMA frames, the system comprising control means capable of allocating a greater number of time slots in each downlink TDMA frame than in each uplink TDMA frame, to said mobile station.

20

According to a third aspect of the present invention there is provided a mobile communication device arranged to operate in a time division multiple access (TDMA) radio system having multi-slot capabilities, the mobile communication device comprising a radio module utilising half-duplex transmission/reception where uplink  
25 and downlink user data transmissions between the mobile communication device and a base station (BS) are made in separate TDMA frames, wherein a greater number of time slots may be allocated in each downlink TDMA frame than in each uplink TDMA frame, to the mobile communication device.

- 30 For a better understanding of the present invention and in order to show how the same may be carried into effect reference will now be made, by way of example, to the accompanying drawings, in which:

Figure 1 shows schematically a GSM mobile telephone network and a mobile station in communication with the network; and

WO 98/59441

PCT/FL98/00468

4

Figure 2 shows schematically uplink and downlink transmissions between a base station of the GSM network and the mobile station.

There is illustrated in Figure 1 a cell 1 of a cellular mobile telephone network. A mobile station (or telephone) 2 located within the cell 1 communicates with a base station (BS) 3 of the cell. As has already been described above, when a call or data connection is made from the mobile station 2 to the BS 3 or *vice versa*, a downlink 'channel' and an uplink 'channel' are reserved to enable bi-directional communication to take place. Both of these channels are in the same frequency band and each consists of a plurality of time slots reserved in every other TDMA frame.

This is illustrated in Figure 2 where the upper diagram illustrates the time slots (2 and 3) reserved for the uplink channel, i.e. for user data transmission from the MS 2 to the BSS 3, MS TX, and the lower diagram illustrates the time slots (3 to 6) reserved for the downlink channel, i.e. for user data reception by the MS 2, MS RX. The TDMA frames (TX and RX frames) of the uplink and downlink channels are interlaced so that the frames alternate between uplink and downlink channels. In this way, regardless of the number or location of slots reserved for either the uplink or downlink channels, the reserved slots will not overlap in time. The MS 2 can therefore be provided with a single radio module 4 which performs both transmission and reception functions.

Furthermore, the number of time slots reserved in any one TDMA frame for the downlink channel is generally greater than the number of channels reserved for the uplink channel (although the system may also be capable of operating in a symmetric allocation mode where the number of slots allocated for reception and transmission are the same). This represents a new multi-slot class for TDMA radio systems. In the example shown in Figure 2, two time slots are allocated to the MS 2 in each of the uplink TDMA frames and four time slots are allocated in each of the downlink frames. As already explained above, higher data transmission rates are generally required for the downlink than are required for the uplink. The asymmetry of time slot allocation tends to increase the efficiency of radio resource allocation and also results in power saving and other efficiencies in the MS 2.

WO 98/59441

PCT/FI98/00468

5

It will be appreciated by the person of skill in the art that modifications may be made to the above described embodiment without departing from the scope of the present invention. In one modification, the uplink and downlink TDMA frames need not be contiguous. For example, one frame in four may be allocated to the uplink and one  
5 frame in four (or one frame in two) allocated to the downlink, provided that the uplink and downlink frames do not overlap.

Whilst the invention relates to the transmission and reception of user data, it is noted that transmission and reception of signalling data may take place in the same TDMA  
10 frame and in the same TDMA frame as either transmission or reception of user data.

WO 98/59441

PCT/FI98/00468

6

## Claims

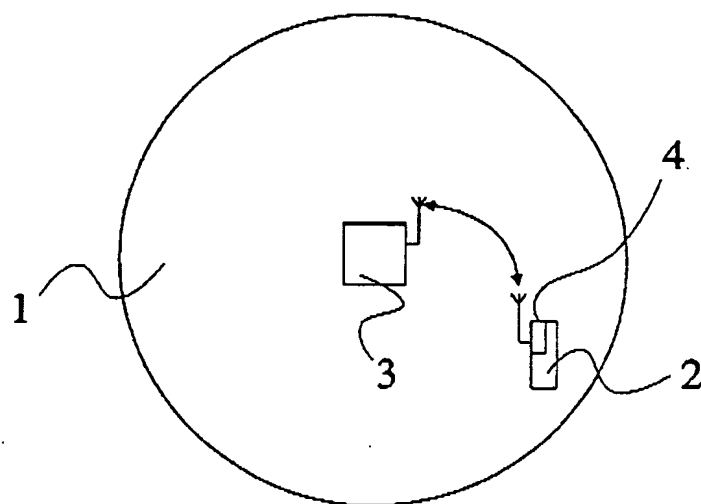
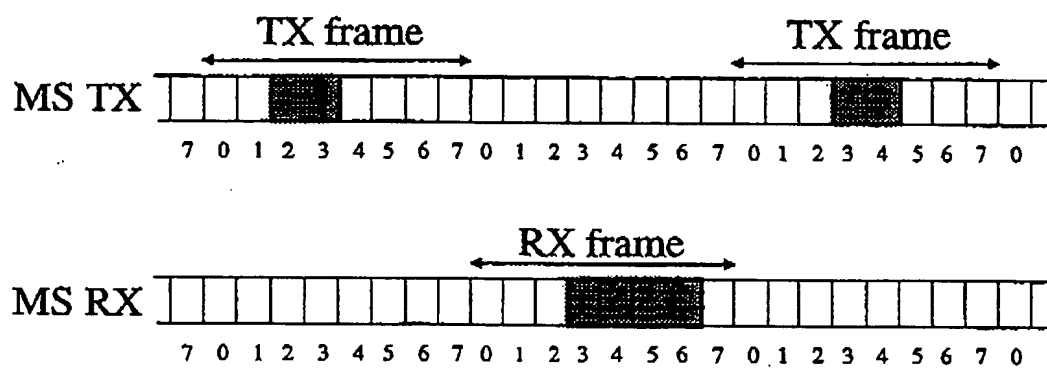
1. A method of operating a time division multiple access (TDMA) radio system having multi-slot capabilities and utilising half-duplex transmission/reception where  
5 uplink and downlink user data transmissions between a mobile station (MS) and a base station (BS) are made in separate TDMA frames, the method comprising allocating a greater number of time slots in each downlink TDMA frame than in each uplink TDMA frame, to said mobile station.
- 10 2. A method according to claim 1, wherein the TDMA frames alternate between reception and transmission frames.
3. A method according to claim 1 or claim 2, wherein the TDMA radio system utilises the GPRS protocol.
- 15 4. A method according to claim 1 or 2, wherein the TDMA radio system utilises the HSCSD protocol.
5. A time division multiple access (TDMA) radio system having multi-slot  
20 capabilities and utilising half-duplex transmission/reception where uplink and downlink user data transmissions between a mobile station (MS) (2) and a base station (BS) (3) are made in separate TDMA frames, the system comprising control means capable of allocating a greater number of time slots in each downlink TDMA frame than in each uplink TDMA frame, to said mobile station (2).
- 25 6. A mobile communication device arranged to operate in a time division multiple access (TDMA) radio system having multi-slot capabilities, the mobile communication device (2) comprising a radio module (4) utilising half-duplex transmission/reception where uplink and downlink user data transmissions between  
30 the mobile communication device (2) and a base station (BS) (3) are made in separate TDMA frames, wherein a greater number of time slots may be allocated in each downlink TDMA frame than in each uplink TDMA frame, to the mobile communication device (2).



WO 98/59441

PCT/FI98/00468

1/1

Figure 1Figure 2